


PLAN VIEW

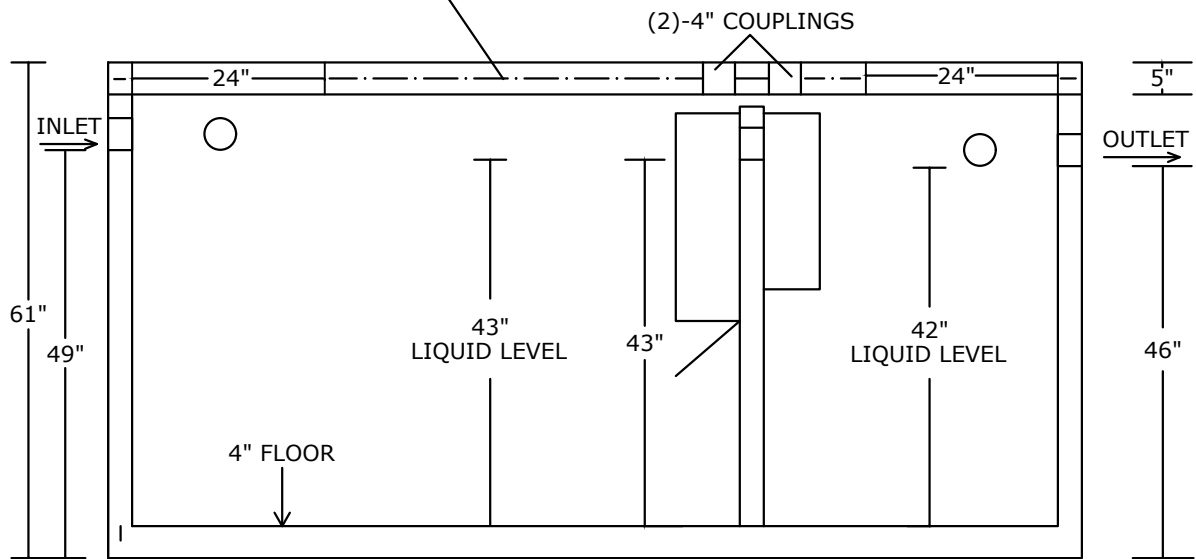

SECTION VIEW

**NOTES:**

- NON-TRAFFIC RATED
- CONCRETE 5,000 PSI @ 28 DAYS
- FIBER REINFORCED WALLS AND BASE
- 6'-0" MAX. BACKFILL ON TOP OF TANK
- INTERIOR COATED 2 COATS OF APPROPRIATE SEALER
- PLASTIC BAFFLES, GAS DEFLECTOR- OUTLET
- OUTLET FILTER/SOLIDS RETAINER UPON REQUEST
- WEIGHT OF TANK W/O LID: 8,500 LBS. +/-
- LID WEIGHT: 4,000 LBS. +/-

<b>PEERLESS CONCRETE PRODUCTS CO.</b> SINCE 1959		246 Main Street Butler, NJ 07405 973.838.3060p	
		sales@peerlessconcrete.com      www.peerlessconcrete.com	
<b>1250 GALLON RECTANGULAR SEPTIC TANK (2 COMPARTMENT)</b>			
CUSTOMER:			
PROJECT:			
SCALE: N.T.S.	DATE: 1/2025	EST#:	<b>A-13</b>