



PLAN VIEW

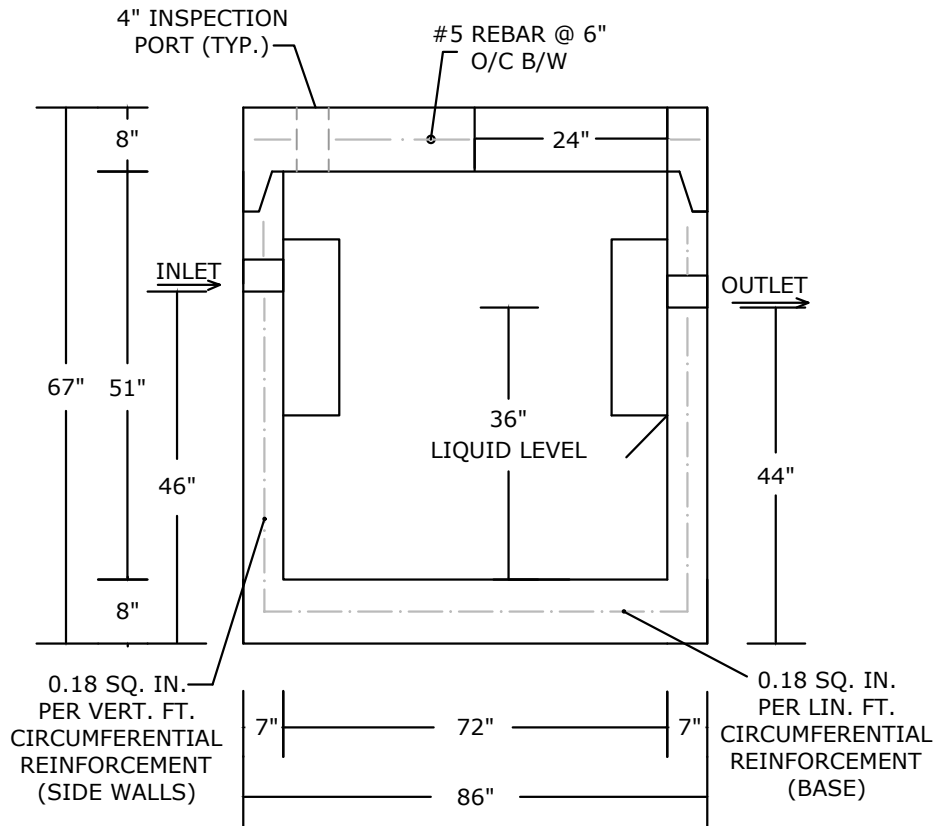

SECTION VIEW

NOTES:

- LOAD RATING: HS-20
- CONCRETE 5,000 PSI @ 28 DAYS
- REINFORCING: AS SPECIFIED, GRADE 60 REBAR
- INTERIOR COATED 2 COATS OF APPROPRIATE SEALER
- PLASTIC BAFFLES, GAS DEFLECTOR- OUTLET
- OUTLET FILTER/SOLIDS RETAINER UPON REQUEST
- WEIGHT: 7,200 LBS.+/-
- WEIGHT OF LID: 5,000 LBS.+/-

| | | | |
|--|--------------|--|-------------|
|  | | 246 Main Street Butler, NJ 07405 973.838.3060p | |
| | | SINCE 1959 | |
| sales@peerlessconcrete.com | | www.peerlessconcrete.com | |
| 500 GALLON HEAVY DUTY ROUND SEPTIC TANK | | | |
| CUSTOMER: | | | |
| PROJECT: | | | |
| SCALE: N.T.S. | DATE: 1/2025 | EST#: | A-22 |