


PLAN VIEW

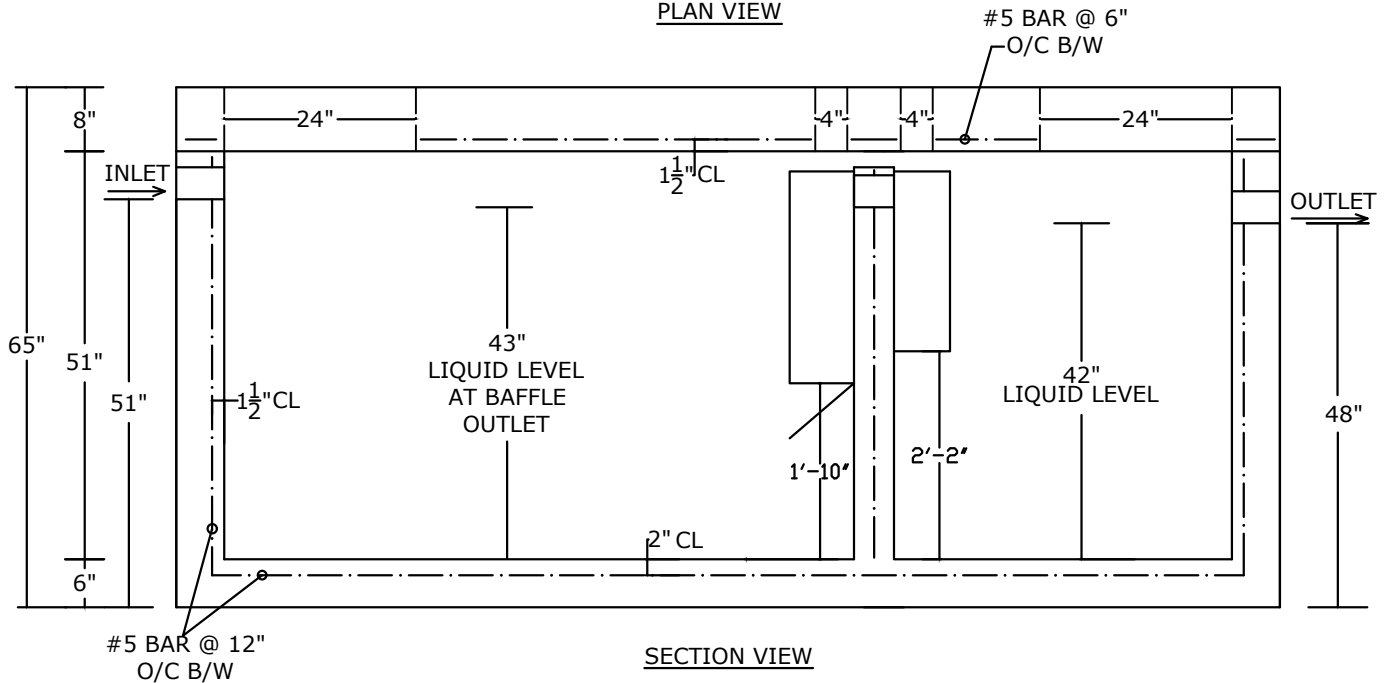

SECTION VIEW

NOTES:

- LOAD RATING: HS-20
- CONCRETE 5,000 PSI @ 28 DAYS
- REINFORCING: AS SPECIFIED, GRADE 60 REBAR
- INTERIOR COATED 2 COATS OF APPROPRIATE SEALER
- PLASTIC BAFFLES, GAS DEFLECTOR- OUTLET
- OUTLET FILTER/SOLIDS RETAINER UPON REQUEST
- WEIGHT: 18,000 LBS.+/-
- WEIGHT OF LID: 9,000 LBS.+/-

PEERLESS CONCRETE PRODUCTS CO.

SINCE 1959

sales@peerlessconcrete.com

246 Main Street
Butler, NJ 07405
973.838.3060p

www.peerlessconcrete.com

1250 GALLON HEAVY DUTY RECTANGULAR SEPTIC TANK (2 COMPARTMENT)

CUSTOMER:

PROJECT:

SCALE: N.T.S.

DATE: 1/2025

EST#:

A-28